



HINO

A Toyota Group Company

HINO 300S

EURO6

5T GVW






Scan to
find out more



Specifications

LDT (Euro 6 New)		XZU605R- WKMMV3 10ft	XZU700R- WKMMV3 12ft	XZU710R- WKMMV3 14ft	XZU710R- WKTMV3 14ft
WEIGHTS					
GVW	kg	5,000	5,000	5,000	5,000
Chassis Weight (Total)	kg	2,055	2,235	2,290	2,325
Front Axle Capacity	kg	2,400	2,600	2,600	2,600
Rear Axle Capacity	kg	4,400			
ENGINE & TRANSMISSION					
Engine Type		Diesel, turbo charged & intercooled, 4-cycle, vertical 4-cyl, in-line, overhead valve, water cooled			
Capacity	cc	4,009			
Max. System Output Kw(Ps)/rpm (Iso Nett)		110 kW at 2,700 r/min			
Max. Torque Nm/rpm		440N · m at 1,300-2,200 r/min			
Fuel System		Electronic control common rail type			
Emission Standard		Euro 6			
Fuel Tank	litres	70	80	100	
Adblue Tank	litres	13			
Transmission		RE50, manual 5-speeds, with overdrive			A860E, automatic 6-speeds, with overdrive
Clutch		Dry single plate with damper springs, facing outisde diameter 325mm, automatic gap adjuster			-
CHASSIS					
Front Axle		Reversed Elliot,"I" section beam			
Rear Axle		Full-floating type			
Service Brake		Hydraulic system with disc brake for front & rear acting on all wheels			
Parking Brake		Mechanical, internal, expanding acting on transmission output shaft			
Exhaust Brake		Hino Engine Exhaust Brake System			
Front Suspension		Double wishbone, independent coil springs with double acting shock absorbers	Semi-elliptic tapered leaf spring with double acting shock absorbers		
Rear Suspension		Semi-elliptic main and auxiliary tapered leaf springs with double acting shock absorbers	Semi-elliptic main and auxiliary tapered leaf spring with double acting shock absorbers		
Wheel Size		16 x 5.5K			
Tyre Size		185 / 85R16 111 / 109	195 / 85R16 114 / 112		
ELECTRICAL COMPONENT					
Batteries		60AH			
Alternator		24V-80A			
LDT (Euro 6 New)		XZU605R- WKMMV3 10ft	XZU700R- WKMMV3 12ft	XZU710R- WKMMV3 14ft	XZU710R- WKTMV3 14ft
DIMENSION					
Overall Length	A - mm	4,705	5,200	6,120	6,120
Overall Width	B - mm	1,850	1,995	1,995	1,995
Overall Height	C - mm	2,100	2,195	2,200	2,195
Wheelbase	D - mm	2,525	2,810	3,430	3,430
Cab to Rear Axle Center	E - mm	2,025	2,250	2,870	2,870
Rear Overhang (at Frame End)	F - mm	1,135	1,270	1,575	1,575
Frame Height at Front Axle	mm	660	675	675	670
Frame Height at Rear Axle	mm	695	755	755	750
Road Clearance	mm	170			
Tread Front/Rear	mm	1,400 / 1,435	1,655 / 1,480		
Min Turning Radius	mm	4,800	4,900	5,800	5,800
Seating Capacity (Include Driver)	pax	3			

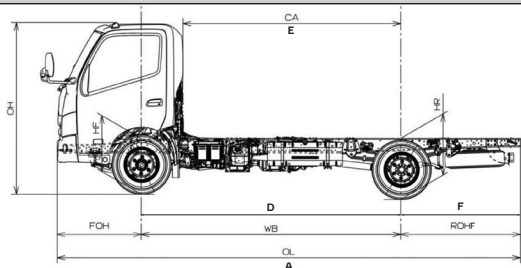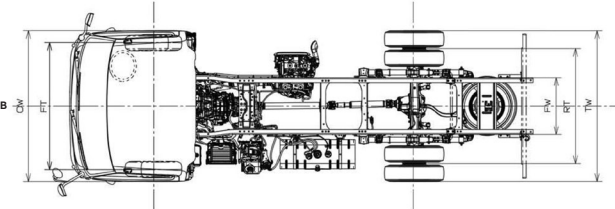



Borneo Motors

HINO SALES

2 Pandan Crescent

Singapore 128462

Monday - Friday: 8.00am - 5.30pm

Closed on Saturday / Sunday / Public Holiday

T 6631 1818 | Hino.com.sg

Hino Motors Ltd and Borneo Motors (Singapore) Pte Ltd reserve the right to alter any details of specifications and equipment without prior notice. Vehicles (trucks) pictured and specifications detailed in this catalogue may vary from models and equipment available in your area. Actual interior features and colors may differ from pictures shown. Vehicle body color might differ slightly from the printed photos in this catalogue.